

BXP01 series Explosion Proof Emergency Power Supply Box

TORMIN



IECEX

ATEX

IP
66

Ta
50

Ta
-25



Ex mark: Ex d IIC T6 Gb
Ex tb IIIC T80°C Db, IP66

Application


- Low installation height equipment area like petrochemical plants, chemical plants, pharmaceutical factory, polishing plant, etc.

Characteristics

- The junction box has the characteristics of small volume, light weight, convenient installation, etc.
- The shell adopts anti-corrosive processing, standard for the 304 stainless steel material, using high-tech surface anti-corrosion treatment technology, applicable to all kinds of bad industrial environment.

Main Specification

Item	Technical Parameter
Input voltage (V)	90~264VAC
Rated frequency	50Hz / 60Hz
Life time (h)	6000
Rated capacity	2.6Ah/14.8V
Cable entry	M20×1.5, M25×1.5, NPT3/4", NPT1/2", G3/4"
Dimension (mm)	238×222×106
Net weight (kg)	2.9

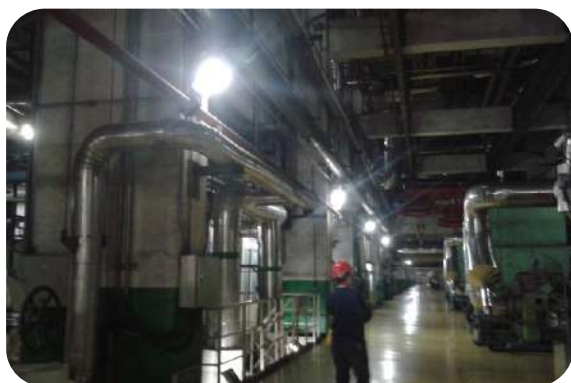

Ordering Reference

Model number	Rated wattage (W)	Emergency duration (min)
BXP01	10W	>140min
	20W	>70min
	30W	>45min

Drawing of Dimension (Dimensions in mm)

