

ZY8200 Series Anti Glare Street Light

TORMIN

IP
65

Ta
40

Ta
-20




Application

This product is widely used in factories, workshops, substations and other places for flood lighting.

Characteristics

- It adopts OSRAM brand light source, reliable performance
- Housing has an compact breathing apparatus, balance internal and external pressure, completely eliminate the condensation phenomena.
- Adopts diffuse reflection technology and protection angle design, can effectively prevent glare, light soft evenly.
- Mounting bracket has adjustment function settings, illumination angle can be adjusted up and down.
- Light body with hand screw, tighten and open more convenient.
- According to customer requirement, mounting bracket optional.

Light distribution Curve

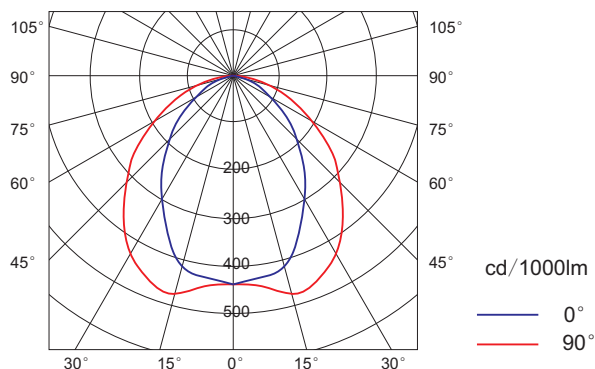

Main Specification

Item	Technical Parameters
Input voltage (V)	220VAC
Rated frequency	50Hz
Life time of light source (h)	10,000
Light source	Metal Halide Lamp
Leading-in cable diameter	Φ 10mm~ Φ 12mm
Dimension (mm)	520×400×175
Net weight (kg)	14





TORMIN ZY8200 Series Anti Glare Street Light


Ordering Reference

Model number	Rated wattage (W)	Light output (lm)	Space height ratio	Mounting height (m)
ZY8200-J250	250W	24500	2.2	4~10m
ZY8200-J400	400W	35300		


Drawing of dimension (Dimensions in mm)




Installation Dimension




Ceiling mounting
(Standard)



Side wall mounting
(Standard)




Seat mounting
(Optional)



Seat mounting (Z1)
(Standard)

Accessories Ordering Information (optional)


Order number	No.	Specifications Model	Quantity
P19	1	60° Bracket	1

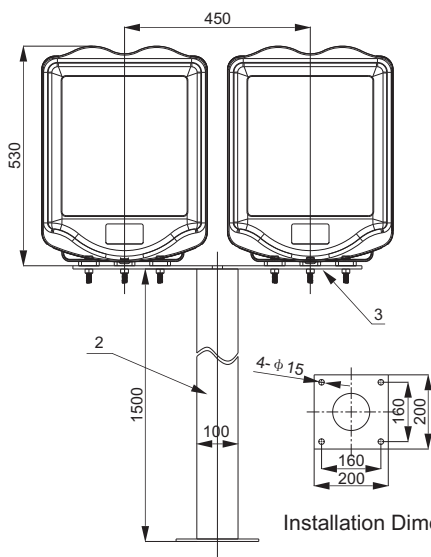

Pole mounting (optional)

Accessories Ordering Information (optional)

Order number	No.	Specifications Model	Quantity
P20	2	Mounting bracket	1
	3	Double slotted rod	1

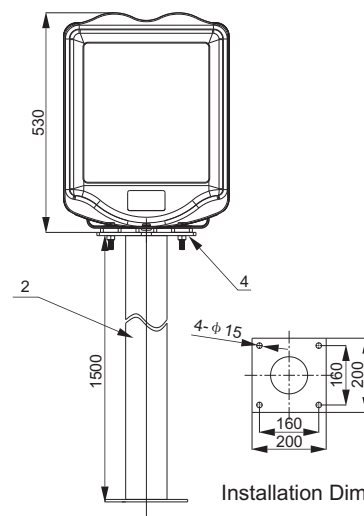

Pole mounting (optional)

Accessories Ordering Information (optional)

Order number	No.	Specifications Model	Quantity	Remark
P21	2	Mounting bracket	1	Length according to customer requirements
	4	Single slotted rod	1	