


IP
65

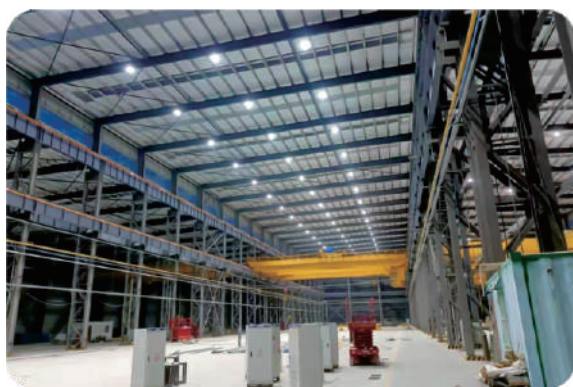

Application

This product is widely used in high ceiling lighting such as industrial plants and warehouses.

Characteristics

- Transparent die-cast housing, high strength and good heat dissipation;
- The whole lamp has a lighting effect of 160lm/W, which is more energy-saving;
- It can be matched with sensors to achieve intelligent control and further save energy;
- It can be matched with a sunshade, the light is not dazzling, and it is more suitable for workshops where people work for a long time.


Main Specification

Item	Technical Parameter
Input voltage range	108~305VAC
Rated frequency	50Hz / 60Hz
Rated wattage	100W~300W
Light source	LED
CRI	70(80 optional)
CCT	5000K
Light source lifetime	100,000hrs
Beam angle	60°/90°/120°

Ordering Reference

Model number	Rated Wattage	Light output(lm)	Space height rate	Mounting height(m)	Net weight (Kg)	Dimensions (mm)	Equivalent to MH
ZY8508B-L100	100W	13500	1.5	3~6	2.5	φ 241 × 110	200W
ZY8508B-L150	150W	20250		5~10	3.5	φ 281 × 110	300W
ZY8508B-L200	200W	27000		8~15	4	φ 321 × 120	400W
ZY8508B-L240	240W	32400		10~20	4.5	φ 361 × 130	500W
ZY8508B-L300	300W	40500		15~35	5.5	φ 361 × 130	600W

Installation and selection

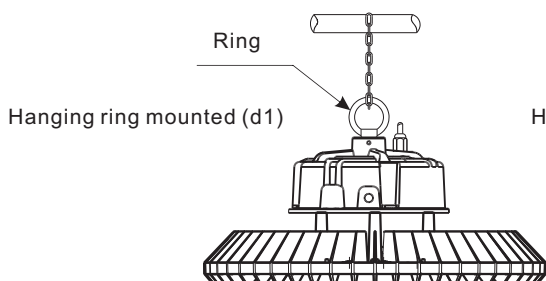

Hanging pole mounted (g)

