


IP
66



Light distribution curve

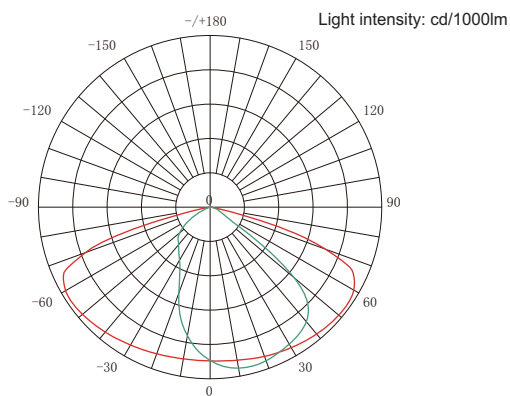

Application

This product is widely used in municipal roads, factory roads, community roads, parks, courtyards, pedestrian walkways and other areas.

Characteristics

- High-pressure die-cast aluminum integrated housing, high strength and good heat dissipation;
- Tempered glass lens, high light efficiency, safe and reliable;
- Hollow design between light source and power cavity, greatly improving heat dissipation capacity;
- Tool-free cover opening structure, more convenient installation and maintenance;
- Protection grade IP66, suitable for various outdoor places;
- The mounting arm is suitable for flat and vertical installation.

Main Specification

Item	Technical Parameter
Input voltage range	90~264VAC
Rated frequency	50Hz/60Hz
Rated wattage	30W~240W
Light source	LED
CRI	70(80 optional)
CCT	4000K(3000K/5000K/6000K optional)
Suitable lamp pole interface diameter	60mm

Ordering Reference

Model number	Rated Wattage	Light output (lm)	Space height rate	Mounting height(m)	Net weight (Kg)	Dimensions (mm)	Equivalent to
							MH
ZY8705C-L30	30W	5400	3.5	3~5	4	498(L)×180(W)×115(H)	70W
ZY8705C-L50	50W	9000		5~8			70W
ZY8705C-L60	60W	10800					100W
ZY8705C-L80	80W	14400		6~10	5.5	629(L)×250(W)×125(H)	150W
ZY8705C-L100	100W	18000					175W~250W
ZY8705C-L120	120W	21600		10~15	6.5	698(L)×280(W)×115(H)	250W
ZY8705C-L150	150W	27000					300W
ZY8705C-L200	200W	36000			7	798(L)×280(W)×138(H)	400W
ZY8705C-L240	240W	43200					400W~650W

Conventional example: The order number of the lamp is ZY8705C-L30-5000K, the product model is ZY8705C, power is 30W power, Color temperature is 5000K

Installation And Selection

